


[vc_rolumn][vc_column][vc_column_text]In the province of Reggio Emilia we have built a private villa of over 300 square meters with Platform Frame technology. The use of this construction system allows to obtain excellent results as regards the anti-seismic, also by developing the building in height and on surfaces of significant dimensions.[/vc_column_text][vc_video link="https://youtu.be/ZByWcusZ_Rw" el_width="90"][/vc_column][/vc_row]


PRODUCT SPECIFICATION

Single-family Residence			
Localization: Reggio Emilia			
Intended use: Detached or Duplex homes Residential buildings			
Architetural and structural design:			
Total area: 300ft			
l nage not found or type un known	luage not found or type unknown	nage not found or type un known	hage not found or type unknown
nage not found or type unknown	luage not found or type unknown	nage not found or type unknown	hage not found or type ur known
mage not found or type unknown	nage not found or type un known	nage not found or type un known	nage not found or type us known
I nage not found or type unknown	mage not found or type unknown	inage not found or type unknown	rnage not found or type unknown

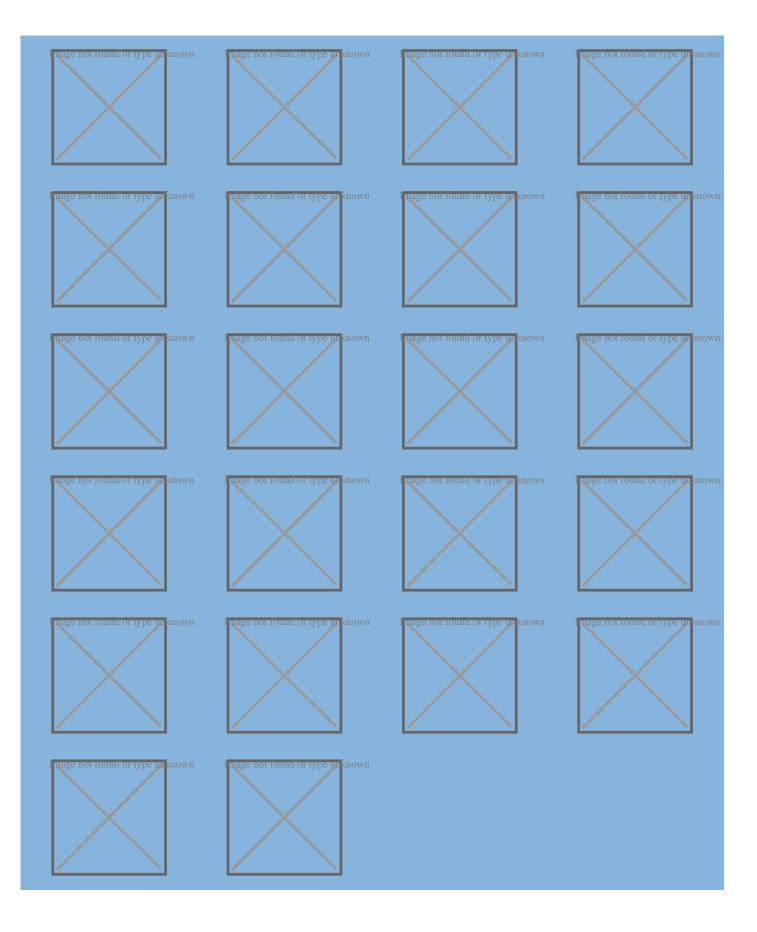

BUILDING SYSTEM

Platform-Frame




Reasons for choosing the Platform-Frame system

The Platform-Frame system is ideal for building prefabricated multi-storey homes and other types of timber buildings. This system can be used to create single residential units and condominium buildings of up to four floors in elevation. That explains why this construction technique is especially suitable for timber buildings for social housing needs: structures for emergency accommodation needs and shared community spaces. The system also offers excellent insulation and antiseismic properties: it offers the highest structural coefficient of all timber construction types. It's also an economical and easy to erect system.

About the Platform-Frame system

In the Platform-Frame construction system each floor of a building functions as a platform to support the floors above. Although developed in Northern Europe, the Platform-Frame system is widely used in North America. Each wall or floor is composed of evenly spaced laminated wood or KVH structural timber studs. The building frame is covered on the exterior side by OSB structural cladding, fixed by means of ring-shank nails and metal angle brackets. The Platform-Frame system is generally built on a reinforced concrete plinth. The connection between timber building and foundations is assured by threaded steel bars or expansion anchors.



Sede / Headquarter:

Sistem Costruzioni s.r.l. Via Montegrappa 18 - 20 41014 Solignano di Castelvetro (MO), Italy Tel. +39 059 797477 - 797591 Fax. +39 059 797646

info@sistem.it www.sistem.it

Sucursal Cuba

Centro de Negocios Miramar Calle 3a e/e 76 y 78, Edificio Beijing, Piso 1, Oficina 133 Ciudad de la Habana, Cuba Tel. 0053 7 2040823

sistemcuba@enet.cu www.sistem.it